




2007-09 Toyota Tundra

"Mesh Bolt Over"

PART# 3907 Upper

Hardware


- 10 - Brackets
- 10 - 10-32 Nyloc Nuts
- 10 - Flat Washers

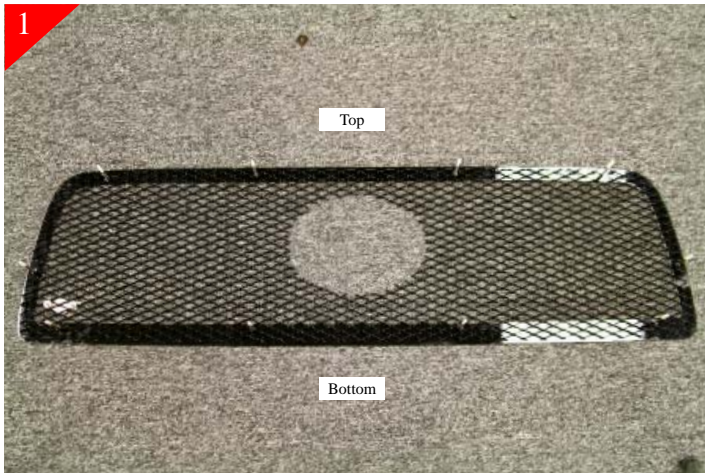

Lay trim ring on a protective work surface, then place the mesh and align so that the mesh clears the mounting studs.



Next place trim ring and mesh into stock grille shell opening and center. In this case we placed the stock shell on top of the mesh and trim ring. Place the supplied washers on mounting studs and then place brackets (Slotted end goes on mounting studs) and secure with the supplied 10-24 nyloc nuts. Check alignment before final tightening of the nuts.

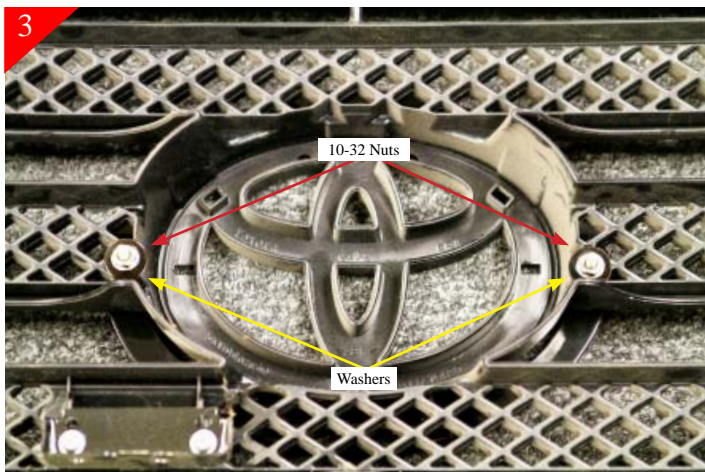

Locate the trim that goes around the stock logo. Note the trim ring mounting studs are off set to the bottom. Place trim ring and center, studs pass through stock shell then place the supplied washers on mounting studs and secure with the supplied 10-24 nyloc nuts