



2010-15 Dodge Ram Full Size 2500/3500 1Pc Bumper Grille Heavy Duty Mesh

Part# 39257

After



Before



Hardware


- 4 - 1/4-20 x 1" Soc head cap screw
- 4 - 1/4-20 Nyloc Nuts
- 8 - 1/4 Washer



Start with removing the plastic push pull style rivets hold core support cover in place. Remove core support cover.



Remove the 10mm bolts holding top portion of the stock grille shell in place.

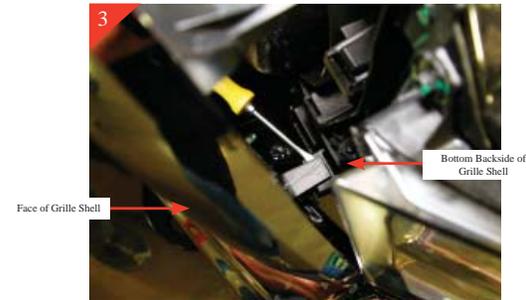


With the top portion of grille shell free, pull shell forward so you are able to reach down the backside of grille shell to release clips holding bottom portion of the stock grille shell in place. Using a regular screwdriver pry up to release clips.




After releasing clips grille shell will be free at this point.

NOTE: If you wish to install bumper grille please do so before reinstalling shell back on vehicle. With shell removed makes it possible to reach behind bumper area.

With grille shell removed place on a protected work surface.

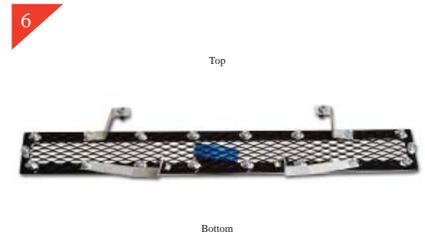

Remove mesh bumper grille from packaging. All necessary brackets and hardware will already be attached to mesh grille in the correct locations as shown.

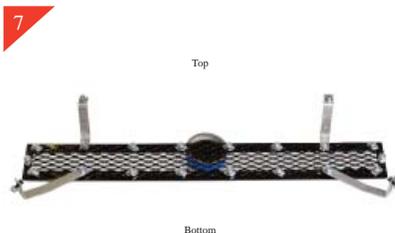

Loosen nuts that are holding brackets in place. The brackets are rotated in for shipping purposes. Next you will remove the bolts and nuts from opposite end of brackets. Rotate brackets as necessary to place mesh grille into bumper opening and center. Then rotate brackets similarly as shown above.

There are stock hole locations that you will attached brackets to. Locate these holes and place bolts through bracket and stock hole then secure in place using the nyloc nut. After you have attached brackets please go back and tighten the 1/2" nut and 12 point bolt that you had loosened up for installation in previous step.