



1994-96 Chevy Impala SS

Part# 41471 - 41472 - 41473




Hardware

1. 4 - Slotted Tabs
2. 4 - U-Clips
3. 4 - #8 x 5/8" Black Screws



STEP 1 Remove Grille shell from the car. Then mask to protect paint finish.

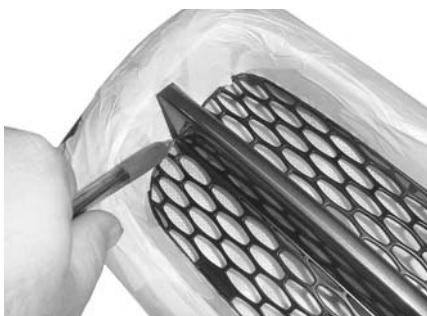

STEP 2 CAREFULLY cut out center bar section from outer grille shell edges.




STEP 3 Cut center section of honey comb away leaving the last 2 rows of comb on top and bottom of shell.



STEP 4 DO NOT cut the 2 hole locations shown above. As this will prevent proper re-installation of grille shell.



STEP 5 Carefully sand all rough edges smooth after cutting.
NOTE: Large cut out remaining may be filled and repainted for better appearance.

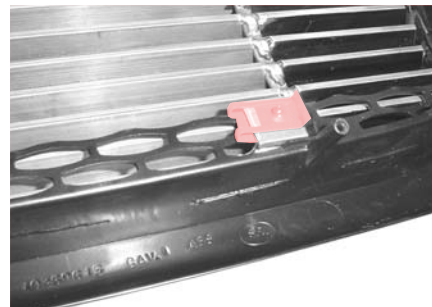

STEP 6 Install Billet Grille from the front of the shell, then center, and attach using tabs as shown. Then reinstall grille shell to car.

Grille installation is complete

NOTE: For better appearance trim the access mesh from grille.

NOTE: Please adjust horizontal blades if irregular. This is the result of shipping and handling outside of Carriage Work's control. Also Carriage Works Inc. recommends applying a high quality automotive wax to maintain the original appearance.