



# 2007 Dodge Nitro (Bumper)


After



**PART# 43721 (Brushed) 43722 - (Polished) 43723 - (Black) Bumper**

## Hardware

- 4 - #8 x 5/8" Phillips head screws
- 4 - U-clips
- 2 - Brackets

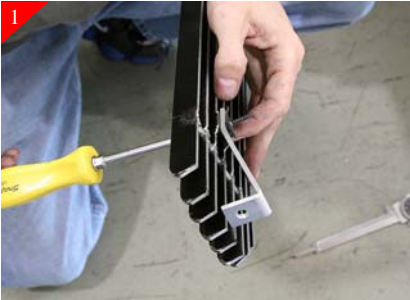

Place supplied U-clips on bumper brackets. Then attach brackets to billet grille using the supplied #8 x 5/8" phillips head screws as shown above.



Place billet grille into bumper opening and center.



Using a scribe mark the mounting locations where it meet the stock opening as shown.



Remove billet grille from opening. Using a 3/16" drill bit, drill the just marked locations.



Remove brackets from billet grille.



Place supplied U-clips on the drilled locations (Step 4). Now attach brackets to the just placed U-clips as shown.



Now place billet grille back into opening and center. Attach billet grille to the brackets using the supplied #8 x 5/8" phillips head screws.

## Completed Installation

For installation of billet grilles that require cutting of the stock shell, proper tools, knowledge and skill are needed. Carriage Works is not responsible for care & accuracy of the installation, only for Fit & Finish of its products. Use a qualified installer or contact original vendor for references to complete all instructions.

NOTE: Please adjust horizontal blades if irregular. This is the result of shipping and handling outside of Carriage Works control.  
Also Carriage Works Recommends applying a high quality automotive wax to maintain the original appearance.