




2007 GMC HD Bolt Over


After



PART# 43951 (Brushed) 43952 - (Polished) 43953 - (Black) Bolt Over Upper

- 4 - Brackets 
- 4 - 10-24 x 3" phillips head bolts
- 4 - 10-24 Nyloc nuts

Start by opening hood. Then locating and removing the plastic rivets holding core support cover in place. This will allow you to reach behind the stock grille shell. Next place billet grille into opening and center. Using the supplied 3" bolt, place bolt thru the mounting tab in billet grille. Now on the back side of the grille shell place the supplied bracket as shown below and tighten using the supplied nyloc nuts. Repeat for all remaining mounting tabs.

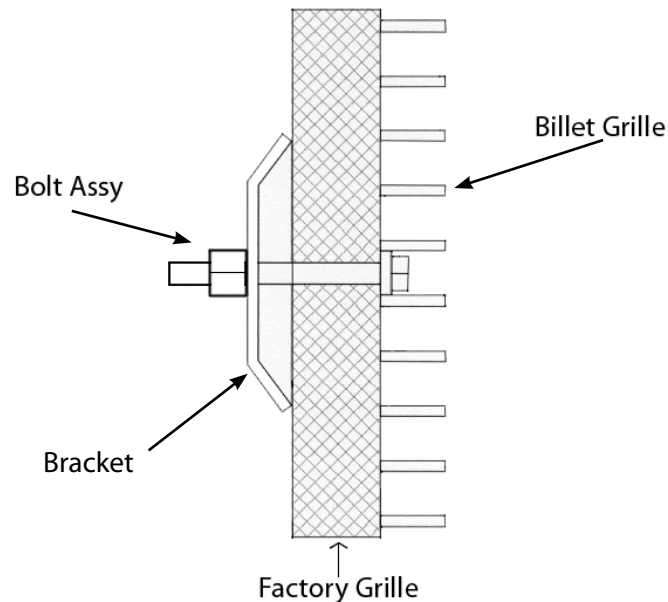

Completed Installation

For installation of billet grilles that require cutting of the stock shell, proper tools, knowledge and skill are needed. Carriage Works is not responsible for care & accuracy of the installation, only for Fit & Finish of its products. Use a qualified installer or contact original vendor for references to complete all instructions.

NOTE: Please adjust horizontal blades if irregular. This is the result of shipping and handling outside of Carriage Works control. Also Carriage Works Recommends applying a high quality automotive wax to maintain the original appearance.