



2008 Toyota Sequoia Bumper

After




PART# 44281 (Brushed) 44282 - (Polished) 44283 - (Black) Bumper

Before



Hardware

- 4 - Brackets 
- 4 - 10-24 x 1" Phillips head bolts
- 4 - 10-24 Nyloc Nuts




Start by placing one of the supplied 10-24 x 1" phillips head bolts thru the mounting tabs in billet grille. Then place billet grille into opening and center.



With the hood open reach around to the backside of the bumper opening and place one of the supplied brackets. The brackets will catch on the plastic of the bumper opening then secure with the supplied 10-24 nyloc nuts. Leave brackets some what loose until all brackets are in place.



Repeat process for remaining brackets and hardware. Check alignment of billet grille then tighten all hardware.

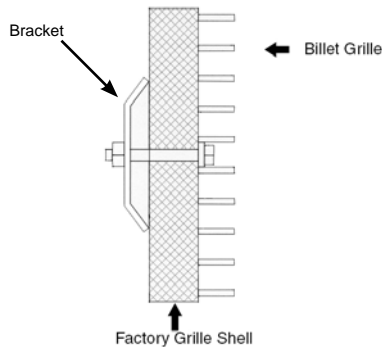

Completed Installation

For installation of billet grilles that require cutting of the stock shell, proper tools, knowledge and skill are needed. Carriage Works is not responsible for care & accuracy of the installation, only for Fit & Finish of its products. Use a qualified installer or contact original vendor for references to complete all instructions.

NOTE: Please adjust horizontal blades if irregular. This is the result of shipping and handling outside of Carriage Works control. Also Carriage Works Recommends applying a high quality automotive wax to maintain the original appearance.