



2010 Toyota 4-Runner

PART# 44681 (Brushed) - 44682 (Polished) - 44683 (Black) Upper

After




Hardware

6 - 2" Toggle Bolt Assemblies

1 Center billet grille in opening. Use supplied hardware and attach per illustration below. Start by placing the supplied 10-24 x 1 ¼" phillips head bolts through the mounting tabs in billet grille. Now attach the wing portion to the bolt. Note for the top mounting you will have to place the wing portion of the toggle bolt after you push the bolt through the mesh of stock grille then place the wing portion (This is only for the top).

2 Place billet grille into opening and center. Push the toggle bolt wing through the stock plastic grille. Loosely Tighten bolts, make any necessary adjustments and fully tighten without over tightening bolts. Repeat process for remaining inserts. Completed Installation

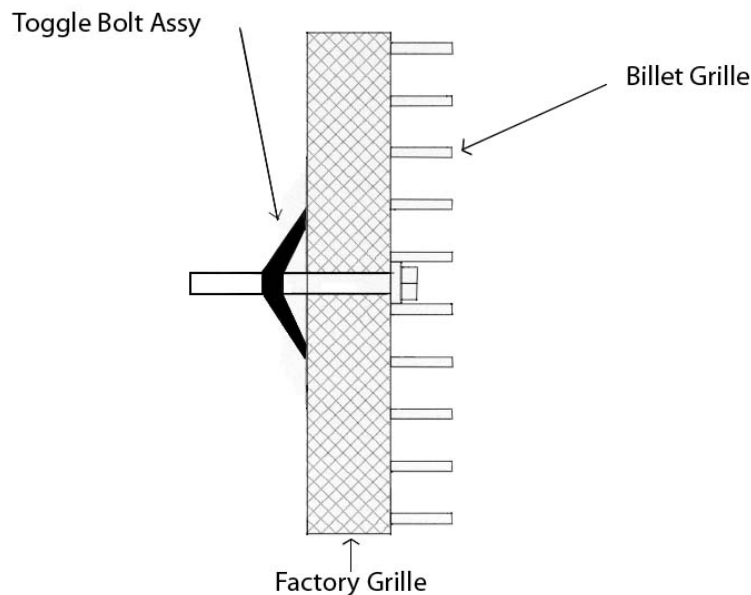

Completed Installation

For installation of billet grilles that require cutting of the stock shell, proper tools, knowledge and skill are needed. Carriage Works is not responsible for care & accuracy of the installation, only for Fit & Finish of its products. Use a qualified installer or contact original vendor for references to complete all instructions.

NOTE: Please adjust horizontal blades if irregular. This is the result of shipping and handling outside of Carriage Works control. Also Carriage Works Recommends applying a high quality automotive wax to maintain the original appearance.